

## RADWIN 2000 A-Series



### RW-2954-A125

#### RW-2954-A125

RW-2954-A125 is a carrier-class radio supports the 5.x GHz bands FCC, IC (Canada), MII (China) and WPC (India) regulations (factory default: 5.4 GHz ). The multi-band radio is part of the RADWIN 2000 A-Series that delivers 25Mbps throughput and extended range.

Packing native TDM and Ethernet over a single wireless link, the RADWIN 2000 A-Series provides 25 Mbps net aggregate throughput (up to 4XE1/T1 plus Ethernet)

RADWIN RW-2954-A125 comes with an integrated antenna.

#### Product Highlights

- 25 Mbps Ethernet net throughput and up to 4E1s/T1s
- Native TDM transport
- Adaptive asymmetric throughput – dynamic allocation between uplink and downlink
- Single radio supporting multiple bands (5.x GHz)
- Advanced MIMO, OFDM and Diversity technologies
- Robust and reliable to operate in tough conditions, extreme temperatures and non line-of-sight scenarios

## Product Specifications

Configuration	
Architecture	Outdoor Unit with Integrated Antenna
IDU to ODU Interface	Outdoor CAT-5e cable; Maximum cable length: 100m
Radio	
Capacity	25 Mbps net aggregate throughput (up to 4E1s/T1s plus Ethernet)
Range	Up to 40 km / 25 miles
Channel Bandwidth	Configurable: 5,10,20 MHz
Modulation	2x2 MIMO-OFDM (BPSK/QPSK/16QAM/64QAM)
Adaptive Modulation & Coding	Supported
Automatic Channel Selection	Supported
Diversity	Supported
Spectrum View	Supported
Max Tx Power	25 dBm
Duplex Technology	TDD
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6
Encryption	AES 128
Ethernet Interface	10/100BaseT
Supported Indoor Units	IDU-C Series (RW-72XX-2000), IDU-E Series (RW-71XX-1000) RADWIN PoE devices (RW-9921-101X) ,
QoS	Packet classification to 4 queues according to 802.1p and Diffserv, Dynamic scheduling according to air interface changes
VLAN	Supported
Ethernet Ring Protection	Supported, including Ethernet 1+1
Monitored Hot Standby (MHS)	1+1 with RADWIN 2000 link or WinLink 1000 link

Supported Bands				
Band	Occupied Frequency Range			Radio Compliance
	Channel BW 5MHz	Channel BW 10MHz	Channel BW 20MHz	
5.8 GHz FCC/IC	5.7275-5.8475 GHz	5.725-5.850 GHz	5.725-5.850 GHz	Non FCC certified
5.9 GHz Universal	5.7375-5.9525 GHz	5.735-5.955 GHz	5.730-5.960 GHz	
5.8 GHz MII China	5.7375-5.8375 GHz	5.735-5.840 GHz	5.730-5.845 GHz	MI I for 5.8 GHz
5.8 GHz WPC India	5.8325-5.8675 GHz	5.830-5.870 GHz	5.825-5.875 GHz	WPC GSR-38
<b>5.4 GHz Universal*</b>	<b>5.4725-5.7225 GHz</b>	<b>5.470-5.725 GHz</b>	<b>5.465-5.730 GHz</b>	
5.3 GHz Universal	5.1475-5.3375 GHz	5.145-5.340 GHz	5.140-5.345 GHz	
4.9 GHz Universal	4.8975-4.9925 GHz	4.895-4.995 GHz	4.890-5.000 GHz	


### \* Factory Default

Mechanical	
Dimensions	24.1(w) x 19.7(h) x 7.7(d) cm
Weight	1.3 kg / 2.8 lbs
Power	
Power Feeding	Power provided over ODU-IDU cable
Power Consumption	<10W
Environmental	
Operating Temperatures	-35°C - 60°C / -31°F – 140°F
Humidity	100% condensing, IP67 (totally protected against dust and against immersion up to 1m)
Safety	
FCC/IC (cTUVus)	UL 60950-1, UL 60950-22, CAN/CSA C22.2 60950-1, CAN/CSA C22.2 60950-22
ETSI	EN/IEC 60950-1, EN/IEC 60950-22
EMC	
FCC	CFR47 Class B, Part15, Subpart B
ETSI	EN 300 386, EN 301 489-1, EN 301 489-4
CAN/CSA-CEI/IEC	CISPR 22-04 Class B
AS/NZS	CISPR 22-2004 Class B


## Integrated Antenna

<b>Minimum Peak Gain</b>	15.5 ± 1.0 dBi @ 5.47-5.875 GHz
<b>VSWR</b>	1.5 : 1 (typ) 1.7 : 1 (max)
<b>3 dB Beamwidth</b>	15° (typ)
<b>AZ &amp; EL Beam Squint</b>	± 2.5° Port V & Port H
<b>Polarization</b>	Dual Linear (Vertical and Horizontal)
<b>Sidelobes Level</b>	ETSI EN 302 085 V1.1.2, TS1-TS3
<b>Cross Polarization</b>	ETSI EN 302 085 V1.1.2, TS1-TS3
<b>F/B Ratio</b>	20 dB (max)
<b>Port To Port Isolation</b>	40 dB (min)
<b>Lightning Protection</b>	DC grounded
<b>Antenna Pattern</b>	

Elevation @ 5.8GHz

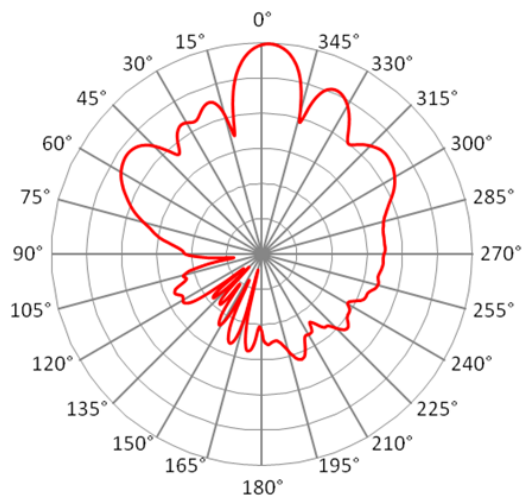

Azimuth @ 5.8GHz

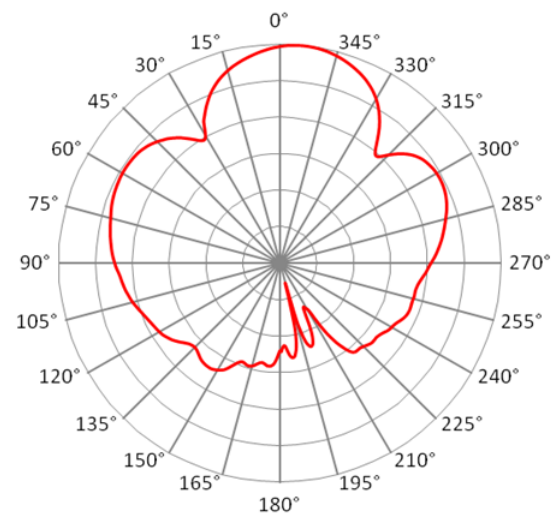

## Ordering Information

**Part Number:** RW-2954-A125

**Description:**

RADWIN 2000 A-Series ODU with integrated antenna, supporting multi frequency bands at 5.x GHz, factory default 5.4 GHz Universal.

**Corporate Headquarters,** T. +972.3.766.2900, E. sales@radwin.com, www.radwin.com

The RADWIN name is a registered trademark of RADWIN Ltd.

© All rights reserved, April 2012

DS RW-2954-A125/04.12